


PLAN

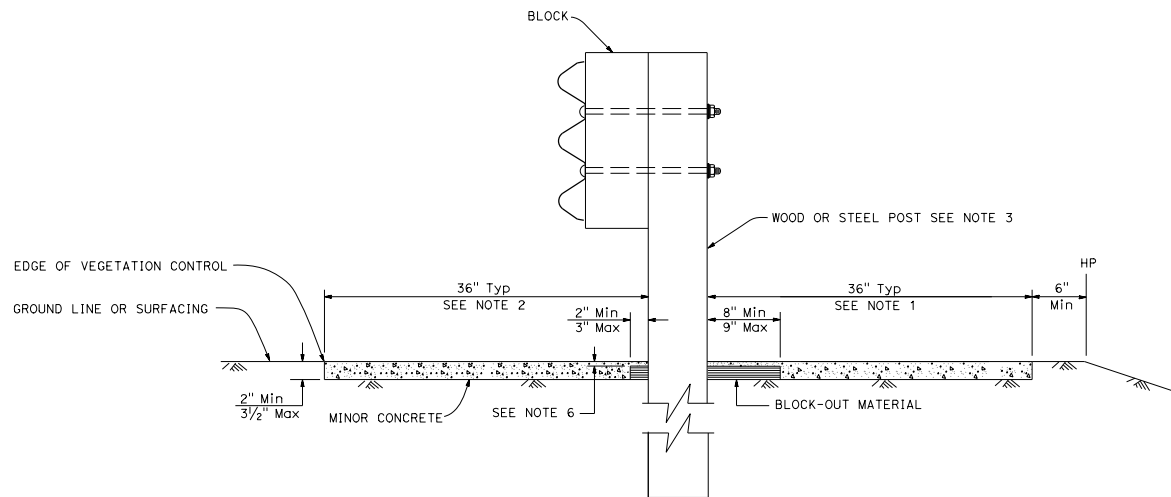

SECTION A-A

## NOTES:

1. Where the distance between back of post and hinge point is less than 42", construct vegetation control to 6" from hinge point while maintaining the 8" block-out at back of post.
2. Where dike is constructed under barrier, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 36" in front of the post, construct vegetation control to the edge of paved shoulder.
3. For wood and steel post sizes, see Standard Plan A78C2.
4. For details not shown, see Standard Plans A78A and A78B.
5. This plan for vegetation control installation only.
6. Concrete over block-out material depth,  $\frac{3}{8}$ " Min to  $\frac{5}{8}$ " Max.

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS

Chi H. Wong  
REGISTERED CIVIL ENGINEER

May 31, 2018  
PLANS APPROVAL DATE

Chi H. Wong  
No. C54738  
Exp. 12-31-19  
CIVIL  
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS  
OR AGENTS SHALL NOT BE RESPONSIBLE FOR  
THE ACCURACY OR COMPLETENESS OF SCANNED  
COPIES OF THIS PLAN SHEET.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**MINOR CONCRETE VEGETATION CONTROL  
SINGLE THRIE BEAM BARRIER**

NO SCALE

**A78C3**